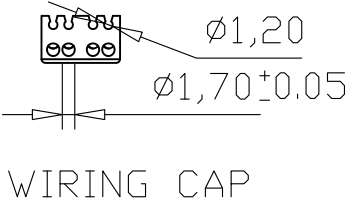




CAT6A Class EA RJ45 plug to be assembled in the field

- FTP TYPE: 1 piece Design
- Easy Assembly - easily terminated in the field in 2 minute without any special tools
- Operation temperature:-40℃ to 60℃, Relative humidity: 85%(30℃), Air pressure: 70-106Kpa.
- Gold Plated Phosphor Bronze Blade: phosphor bronze and gold plating (3~50uinch), mating durability not less than 750 cycles ;
- Anti-burn performance: product made from Kirsite \ PC
- Intermediate resistance: no more than 20m ohm in normal atmosphere pressure (not including bulk resistor) ;
- Insulated resistance: no less than 1,000M ohm in normal atmosphere pressure ;
- Intensity of anti-currency: DC 1,000V (AC,700V), no puncture and flash-over phenomenon in one minute ;
- Retention strength: 7.7kg between jack and plug.
- Label: clear label to ensure easy to management ;
- Cable Jacket Diameter from 6 to 8.3 mm



TITLE:			 Shenzhen Copperled Technology Co.,Ltd CopperLed		
	INCH	MM			
.X	.015	.30			
.XX	.010	.10	TITLE: Cat.6A STP RJ45 Field Module Plug Sleeve		
.XXX	.005	.05	P/N: CL-IPF-C6AS		
DRAWN BY	MA		SCALE	1:1	 REV
CHECK BY			UNIT	MM	
APPD BY			SHEET	1/1	DWG NO:
			DATE	2019/01/10	