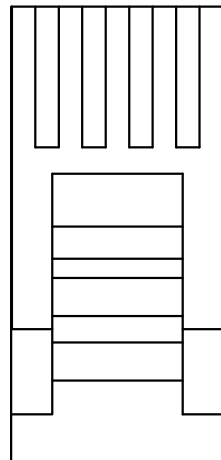




A向



Key Specifications/Special Features

- 1.Operation temperature:-40 °C to 60 °C , Relative humidity: 85%(30 °C) , Air pressure: 70-106Kpa.
- 2.Insertion force: 2 contacts:350g, 4 contacts:500g, 6 contacts:750g, 8 contacts:900g
- 3.IDC: phosphor bronze and silver plating (20~50uinch), suitable diameter 0.4-0.6mm ;
- 4.Contact pin: phosphor bronze and gold plating (20~50uinch) ;
- 5.Anti-burn performance: plastic made from ABS and PC ;
- 6.Retention strength: 7.7kg between jack and plug ;
- 7.Label: clear label to ensure easy to management ;
- 8.Standard: designed by international ISO/IEC11801 and TIA/EIA568 ;

TITLE:			 Shenzhen CopperLed Technology Co.,Ltd CopperLed		
INCH	MM				
.X	.015	.30			
.XX	.010	.10			
.XXX	.005	.05			
DRAWN BY	MA		TITLE: Cat.3 6P4C Keystone Jack, Toolless		
CHECK BY	P/N: CL-KJ-C301		SCALE	1:1	 REV
	UNIT		MM		
APPD BY	SHEET		1/1	DWG NO:	
	DATE		2017/08/22		