

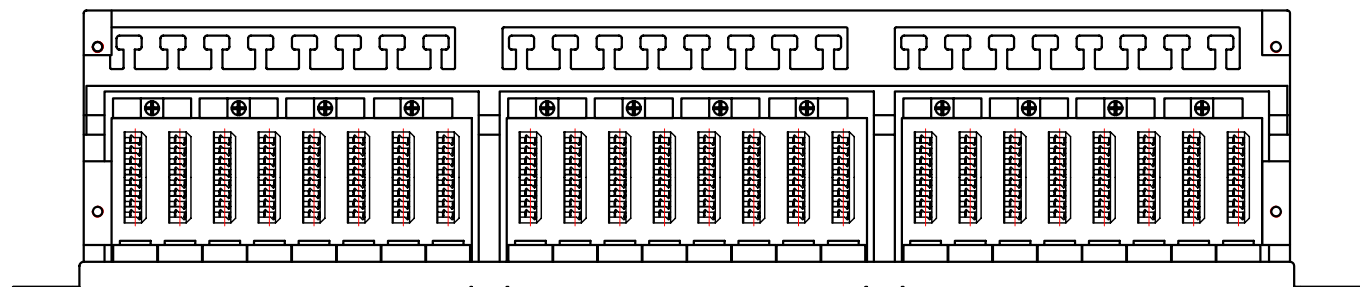

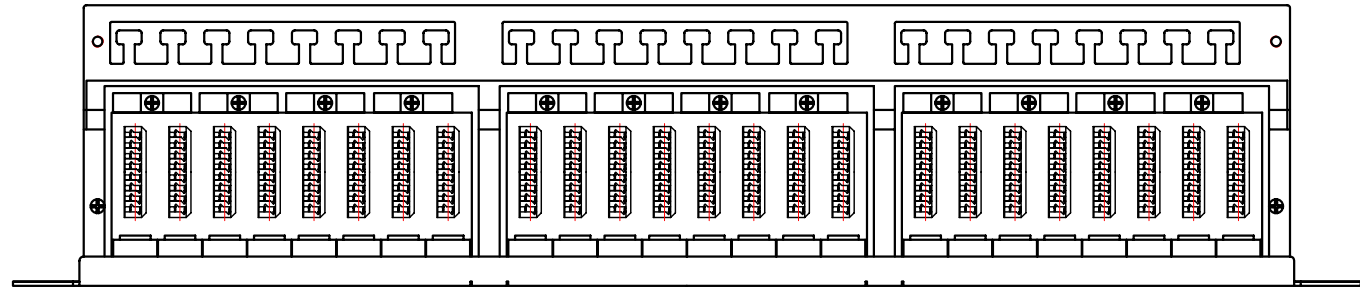

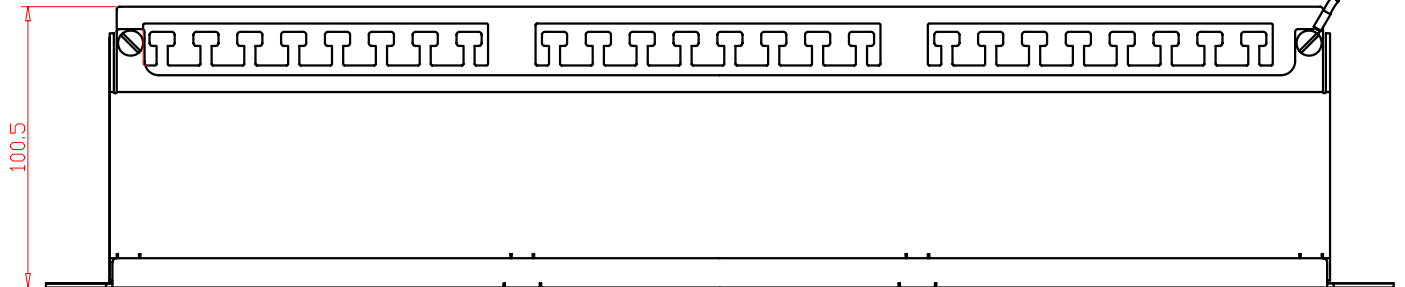


REVISION RECORD				
REV	ECD	DESCRIPTION	DRFT	CHKD

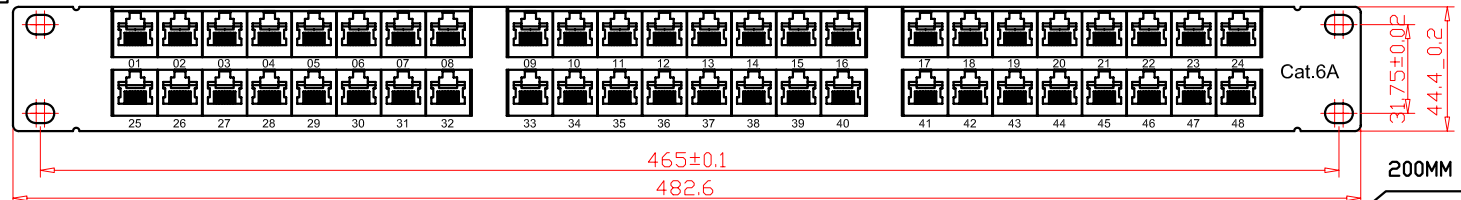

- NOTES:
- ELECTRICAL:
- 1. VOLTAGE RATING: 125 VAC RMS.
 - 2. CURRENT RATING: 1.5 AMP.
 - 3. CONTACT RESISTANCE: 100 MILLIOHMS MAX.
 - 4. INSULATION RESISTANCE: 1000 MEGOHMS MIN
 - 5. DIELECTRIC STRENGTH: 750 VAC RMS 60HZ, 1MIN.

- MECHANICAL:
- 1. HOUSING MATERIAL: PBT+15%GF UL94V-0.
 - 2. PANEL FRAME: CARBON STEEL ,POWDER COATING IN BLACK COLOR
 - 3.IDC MATERIAL :PC UL94V-0
 - CONTACT: PHOSPHOR BRONZE WITH NICKEL PLATING

← MM (INCH) →		DFTD SUSAN	DATE 6/5/07'
TOLERANCES EXCEPT AS NOTED		CHKD STONE	DATE 6/15/07'
MM		MFD	DATE
.0 ± 0.15	±	APPV JASON	DATE 6/15/07'
.00 ± 0.075	±	MATERIAL :	
.000 ± 0.05	±	QT'Y :	
ANGLES ± 0.5		FINISH:	
THIRD ANGLE PROJECTION		SCALE : 1:2	

Shenzhen Copperled Technology Co.,Ltd
 CopperLed

TITLE FTP 1U Cat.6A Modular Patch Panel
48Port with Back Bar
P/N:CL-F48P-C6A02

DRAWING NO.	SIZE	REV
/PART NO.	A3	10

DO NOT SCALE DRAWING SHEET 1 OF 1